




| Stückliste / Parts list |                              |                                                                             |
|-------------------------|------------------------------|-----------------------------------------------------------------------------|
| Pos.                    | Artikel-Nr.:<br>order number | Bezeichnung<br>title                                                        |
| 1                       | 1024087                      | Pyrometer CellaTemp PA 20 AF 3/L<br><i>Pyrometer CellaTemp PA 20 AF 3/L</i> |
| 2                       | 1099355                      | Montagekombination PA 20-117<br><i>Mounting PA 20-117</i>                   |
| 3                       | 515152                       | Kabel VK 01/X AF 1<br><i>Cable VK 01/X AF 1</i>                             |
| 4                       | 1024914                      | Kabel VK 01/Y AF 3<br><i>Cable VK 01/Y AF 3</i>                             |


Gewicht: 10.930 Kg  
Weight: 10.930 Kg

Seite 1 von 1  
Page 1 of 1

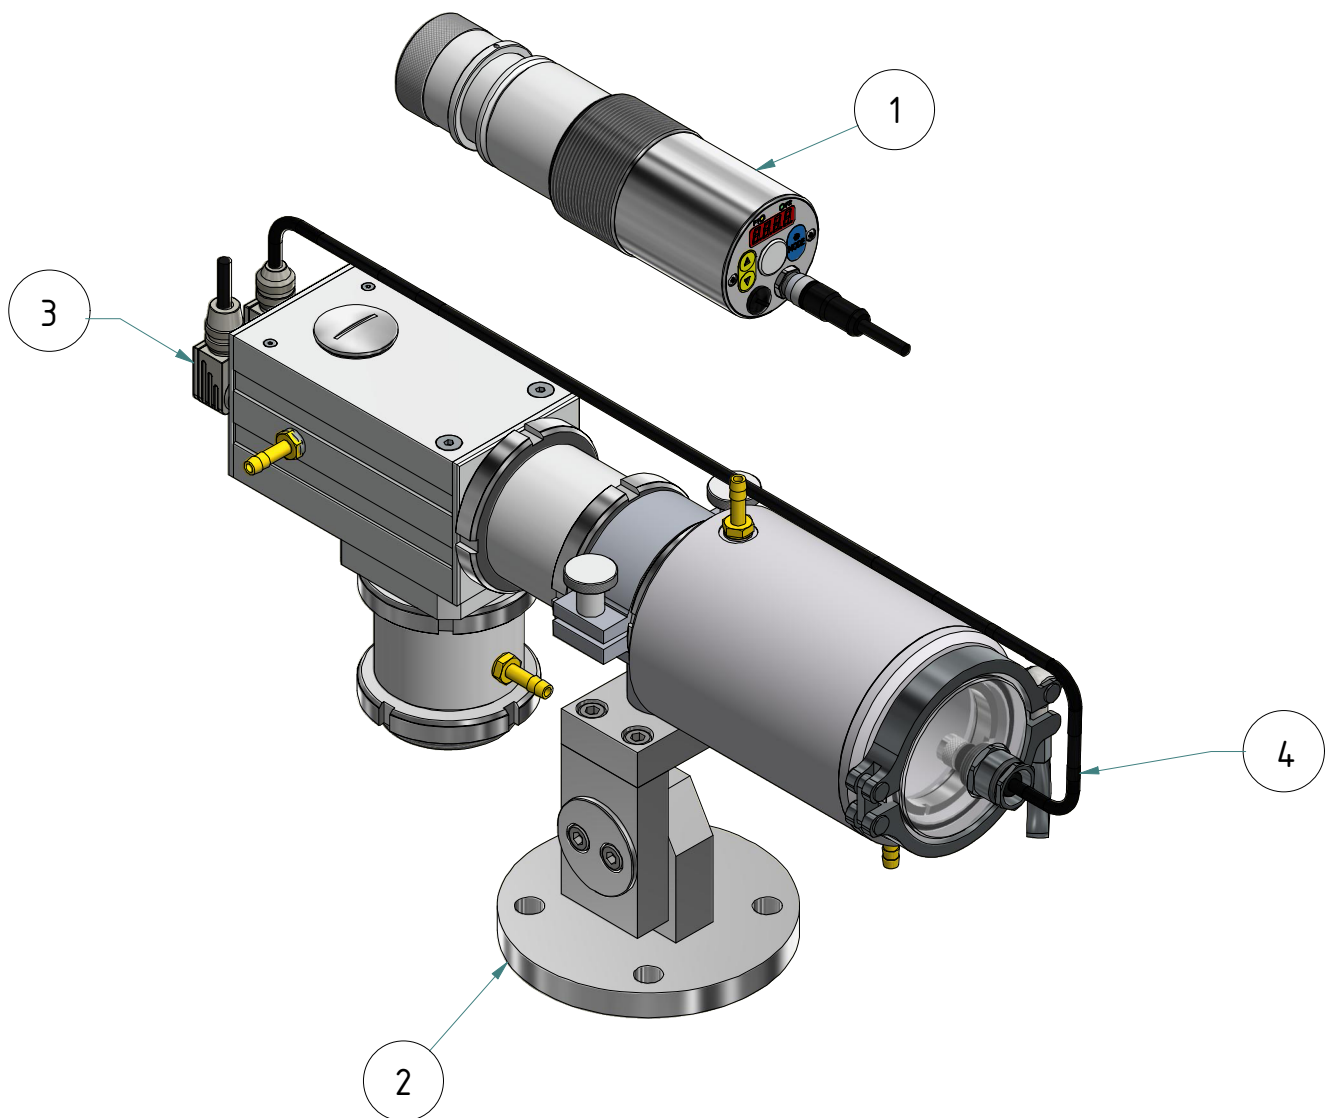

## Optik Lens

|                                                              | min.<br>[mm] | max.<br>[mm] |
|--------------------------------------------------------------|--------------|--------------|
| Super-Tele Optik PA 20.06<br><i>Telephoto lens PAZ 20.06</i> | 116,5        | 163,5        |
| Standard Optik PZ 10.01<br><i>Standard lens PZ 10.01</i>     | 35,0         | 44,4         |
| Nah Optik PZ 10.05<br><i>close-up lens PZ 10.05</i>          | 35,0         | 44,4         |
| Standard Optik PZ 15.03<br><i>Standard lens PZ 15.03</i>     | 51,5         | 65,0         |
| Standard Optik PZ 20.01<br><i>Standard lens PZ 20.01</i>     | 49,8         | 69,9         |
| Nah Optik PZ 20.03<br><i>Close-up lens</i>                   | 49,7         | 67,9         |
| Panorama Optik PZ 40.03<br><i>Panorama Optik PZ 40.03</i>    | 52,1         | 67,9         |
| Weitwinkel Optik PZ 20.05<br><i>Wide-angle lens PZ 20.05</i> | 62,8         | 64,7         |
| Tele Optik PZ 20.06<br><i>Telephoto lens PZ 20.06</i>        | 93,0         | 112,0        |
| Spezial Optik PZ 20.08<br><i>Special lens PZ 20.08</i>       | 35,0         | 44,4         |

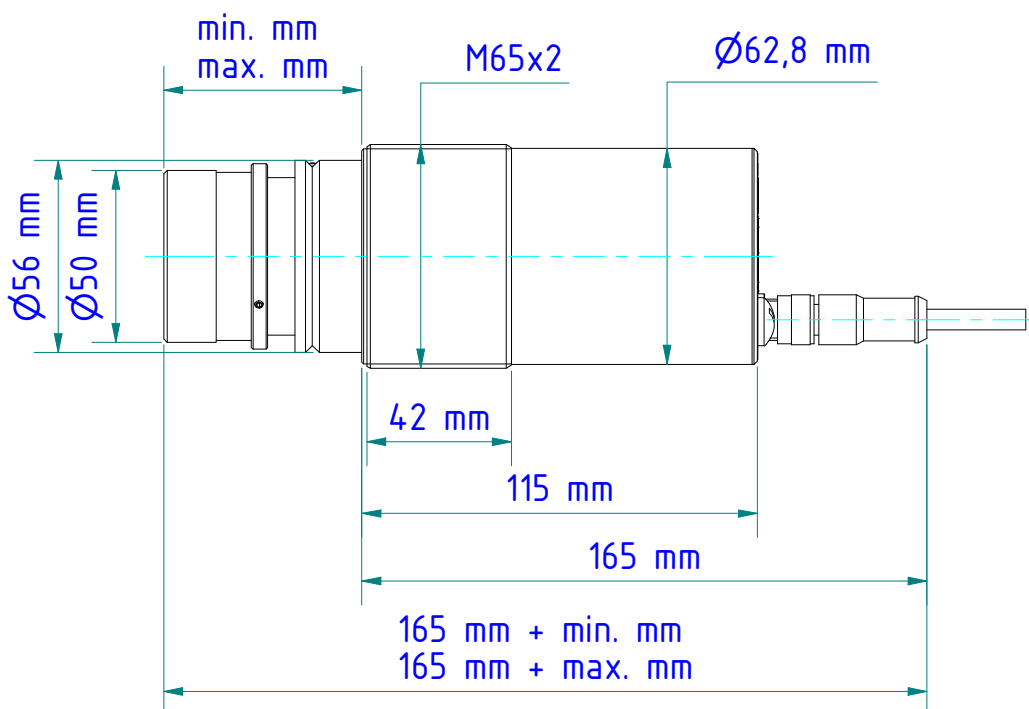

# Schwenkspiegel PZ 20/X AF5

Oscillating mirror PZ 20/X AF5  
nr./no. 561630

Kabel  
cable

Zwischenrohr PZ 20/J  
Intermediate tube PZ 20/J  
nr./no. 514814

Befestigungsschelle PZ 20/L AF2  
Clamping collar PZ 20/L AF2  
nr./no. 561541

Kühlarmatur, geschlossen PA 20/M AF1  
Cooling jacket, sealed PA 20/M AF1  
nr./no. 1027765

Kabel  
cable


Schutzscheibe M62x0,75  
Protective glass M62  
nr./no. 1048533



Anbaufansch PZ 40/D  
Mounting flange PZ 40/D  
nr./no. 515165

Axialluftdüse PZ 20/A AF1  
Air purge PZ 20/A AF1  
nr./no. 561176

Halterung PB 08/Q AF1  
mounting PB 08/Q AF1  
nr./no. 1080289

Flansch PB 08/R AF1  
flange PB 08/R AF1  
nr./no. 1080288

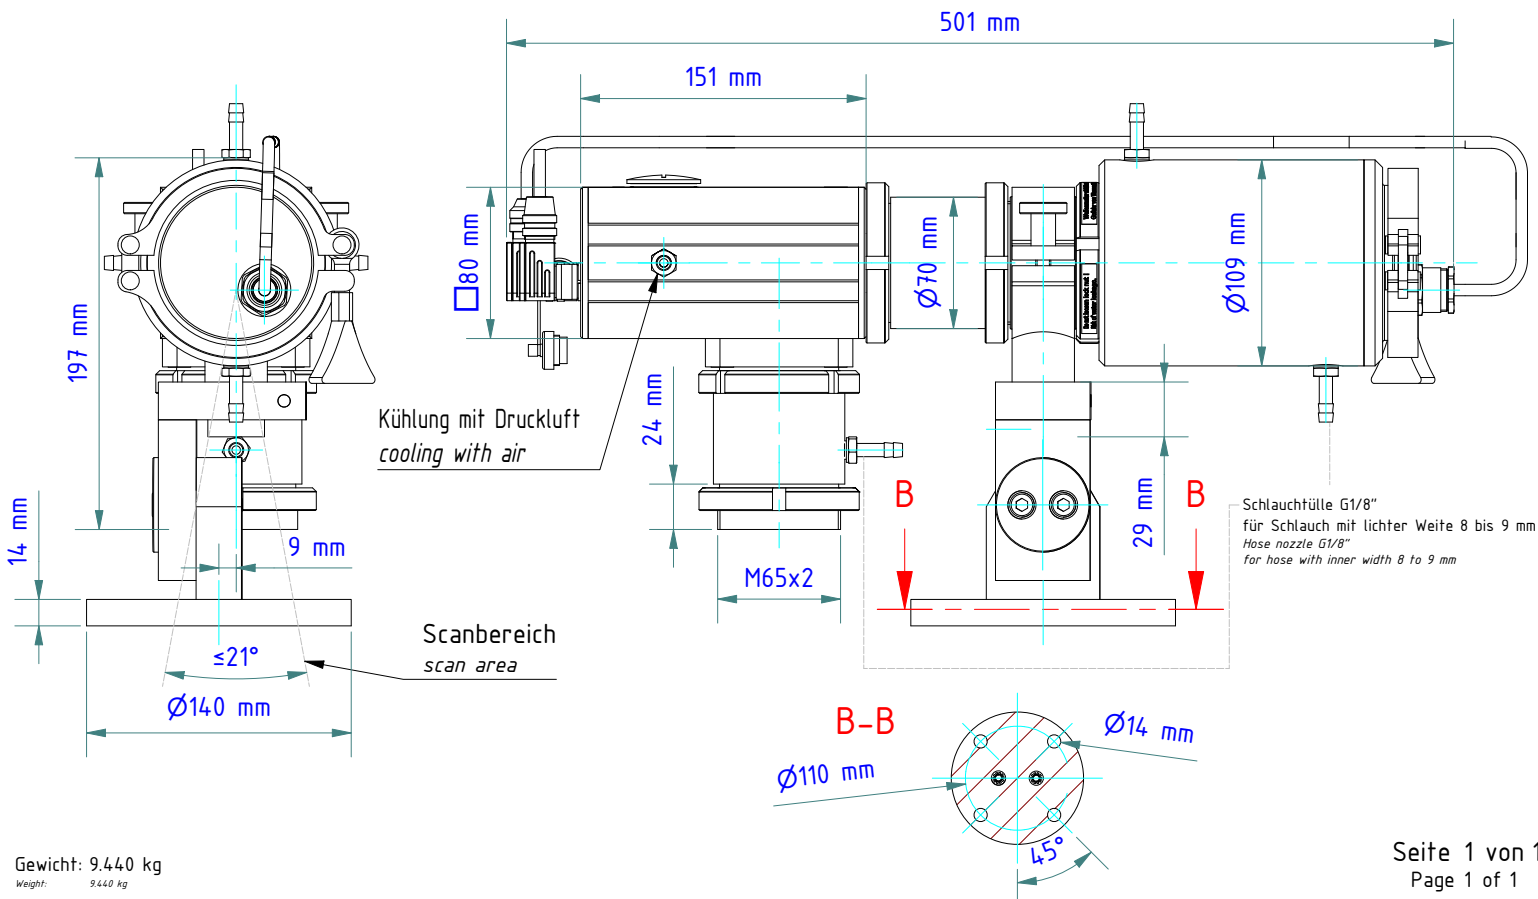


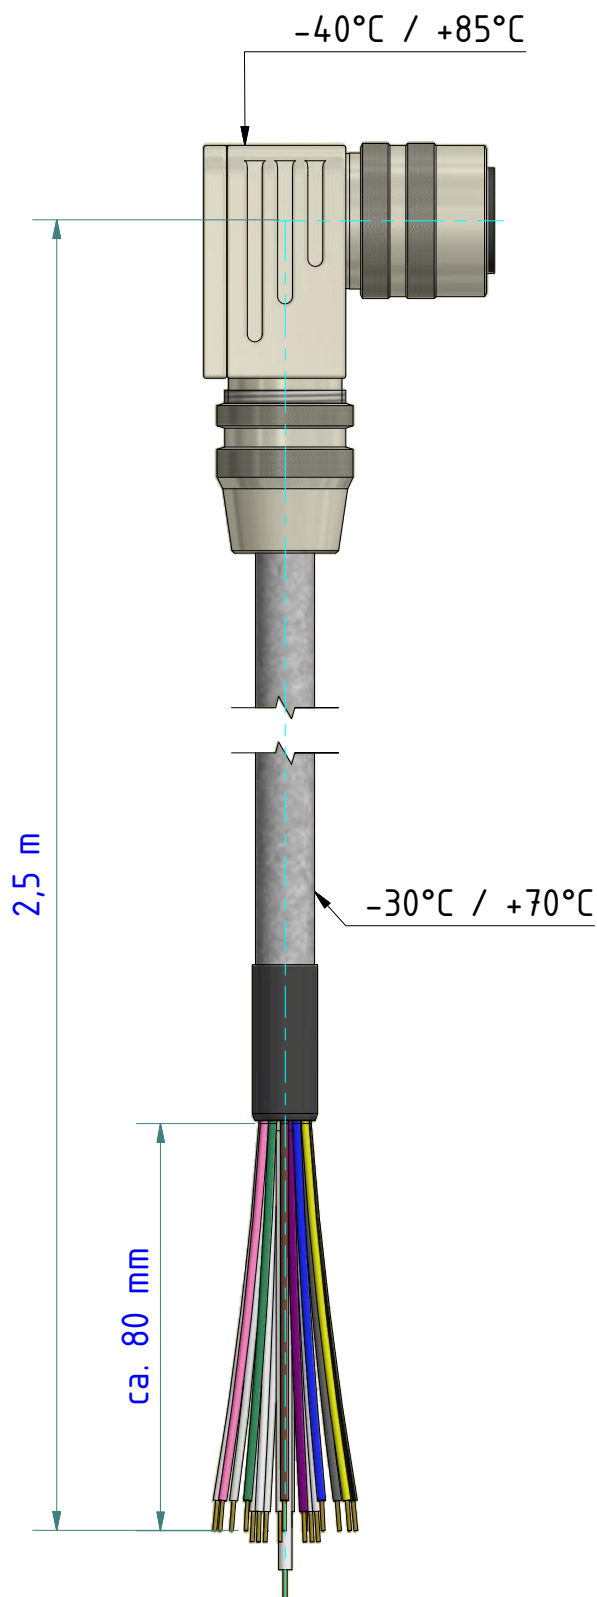
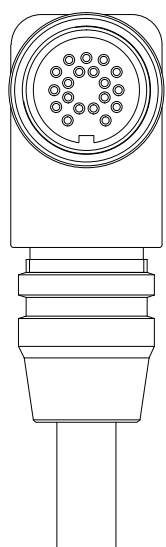


| Belegung<br><i>Configuration</i>  | Pol<br><i>contacts</i> |
|-----------------------------------|------------------------|
| rosa<br><i>pink</i>               | an A<br><i>at A</i>    |
| weiß<br><i>white</i>              | an B<br><i>at B</i>    |
| grau<br><i>grey</i>               | an C<br><i>at C</i>    |
| gelb<br><i>yellow</i>             | an D<br><i>at D</i>    |
| violett<br><i>violet</i>          | an E<br><i>at E</i>    |
| braun<br><i>brown</i>             | an F<br><i>at F</i>    |
| grün<br><i>green</i>              | an G<br><i>at G</i>    |
| rot-blau<br><i>red-blue</i>       | an H<br><i>at H</i>    |
| rot<br><i>red</i>                 | an J<br><i>at J</i>    |
| grau-rosa<br><i>grey-pink</i>     | an K<br><i>at K</i>    |
| blau<br><i>blue</i>               | an L<br><i>at L</i>    |
| schwarz<br><i>black</i>           | an M<br><i>at M</i>    |
| weiß-rosa<br><i>white-pink</i>    | an N<br><i>at N</i>    |
| grau-braun<br><i>grey-brown</i>   | an O<br><i>at O</i>    |
| braun-grün<br><i>brown-green</i>  | an P<br><i>at P</i>    |
| weiß-grün<br><i>white-green</i>   | an R<br><i>at R</i>    |
| gelb-braun<br><i>yellow-brown</i> | an S<br><i>at S</i>    |
| weiß-gelb<br><i>white-yellow</i>  | an T<br><i>at T</i>    |
| weiß-grau<br><i>white-grey</i>    | an U<br><i>at U</i>    |

Schirm durchgängig an Verschraubung  
*Shield constantly at screw connection*

Gewicht: 0.308 Kg  
*Weight: 0.308 Kg*

Seite 1 von 1  
*Page 1 of 1*

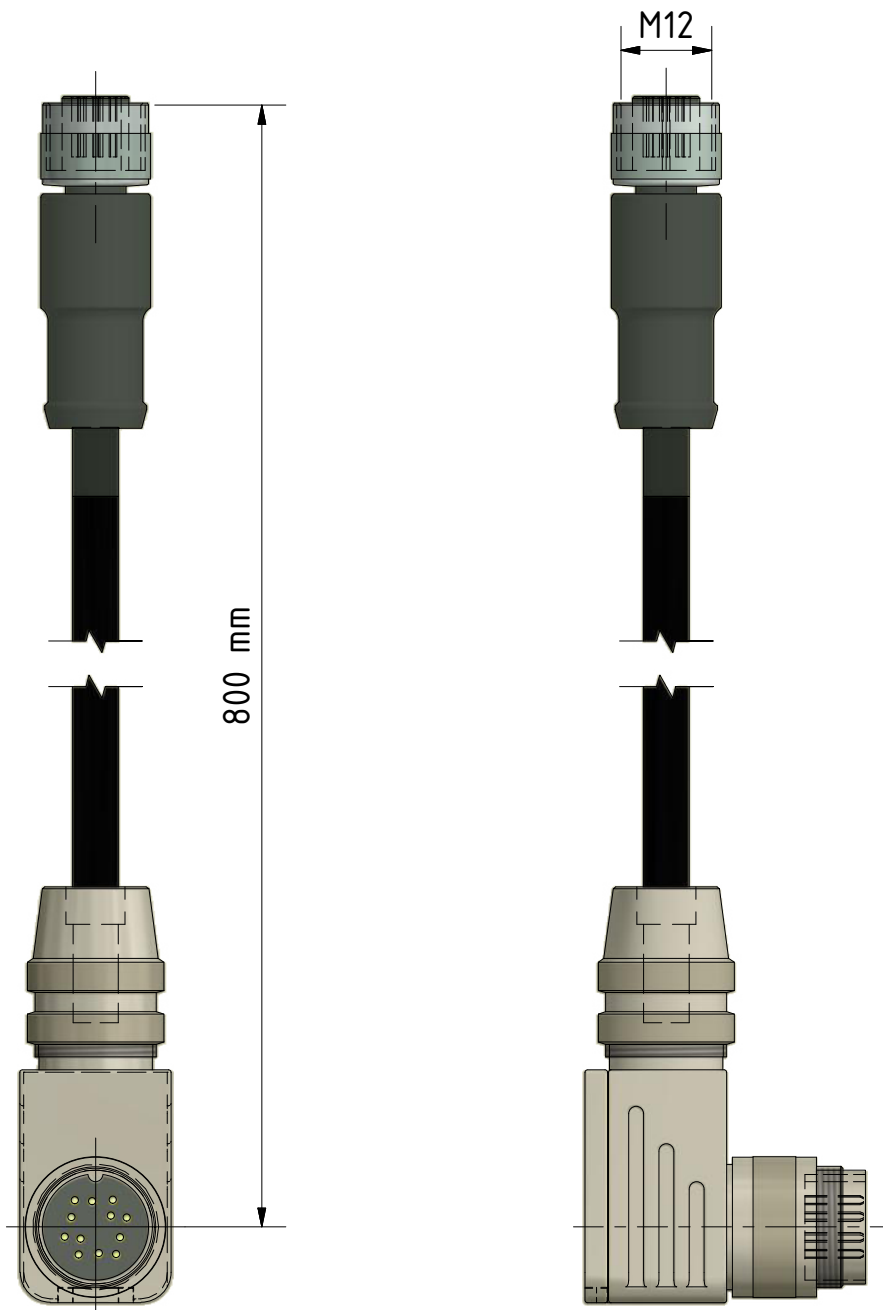


Gewicht: 0.122 Kg

Weight: 0.122 Kg



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH  
Infrared Temperature Solutions (ITS)  
Carl-Keller-Straße 2-10  
49479 Ibbenbüren-Laggenbeck  
Germany

[www.keller.de/its](http://www.keller.de/its)  
Tel. +49 (0) 5451 850  
Fax +49 (0) 5451 85412  
[its@keller.de](mailto:its@keller.de)

## Distributor



INOR Transmitter Oy  
Unikkotie 13  
FI-01300 Vantaa  
Puhelin +358 10 4217900  
Faksi +358 10 4217901  
[myynti@inor.fi](mailto:myynti@inor.fi)