


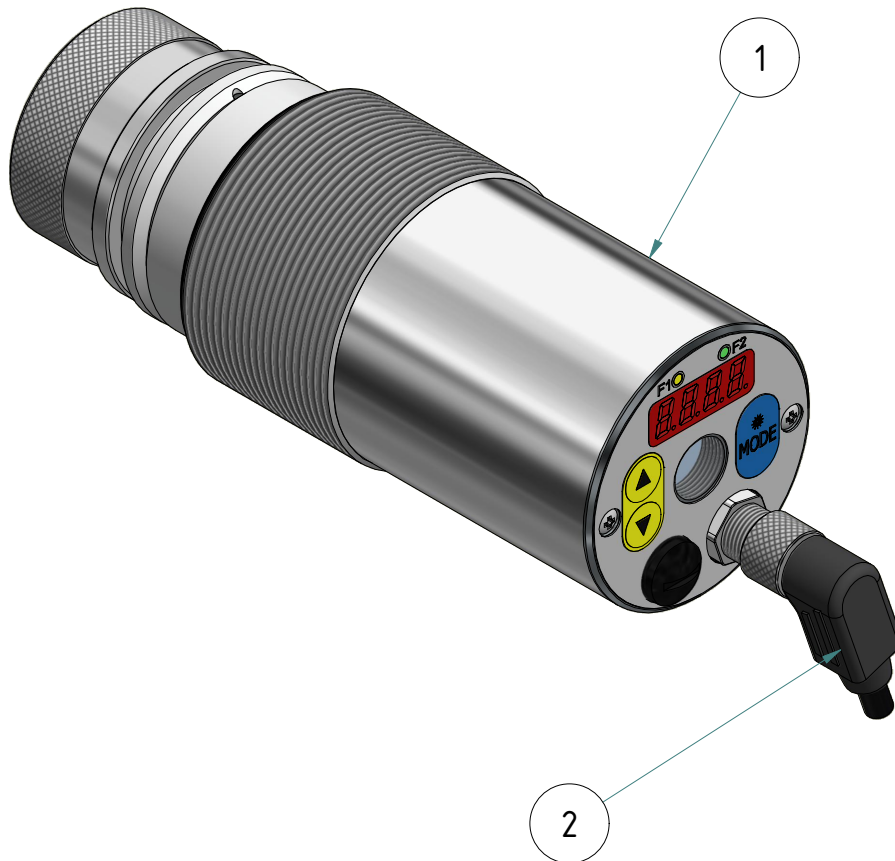

jedoch ohne
- USB Kabel VK 11/D 1009677
- Anschlusskabel VK 02/A 1013909

but without
- USB cable VK 11 / D 1009677
- Connection cable VK 02 / A 1013909

Stückliste / Parts list		
Pos.	Artikel-Nr.: order number	Bezeichnung title
1	1026585	Pyrometer CellaTemp PA 40 AF 7 Pyrometer CellaTemp PA 40 AF 7
2	1031254	Kabel VK 02/C AF 2 Cable VK 02/C AF 2


Gewicht: 1.220 Kg
Weight: 1.220 Kg


Seite 1 von 1
Page 1 of 1



Optik Lens

	min. [mm]	max. [mm]
Standard Optik PZ 10.01 <i>Standard lens PZ 10.01</i>	35,0	44,4
Nah Optik PZ 10.05 <i>close-up lens PZ 10.05</i>	35,0	44,4
Standard Optik PZ 15.03 <i>Standard lens PZ 15.03</i>	51,5	65,0
Standard Optik PZ 20.01 <i>Standard lens PZ 20.01</i>	49,8	69,9
Nah Optik PZ 20.03 <i>Close-up lens</i>	49,7	67,9
Panorama Optik PZ 40.03 <i>Panorama Optik PZ 40.03</i>	52,1	67,9
Weitwinkel Optik PZ 20.05 <i>Wide-angle lens PZ 20.05</i>	62,8	64,7
Tele Optik PZ 20.06 <i>Telephoto lens PZ 20.06</i>	93,0	112,0
Spezial Optik PZ 20.08 <i>Special lens PZ 20.08</i>	35,0	44,4

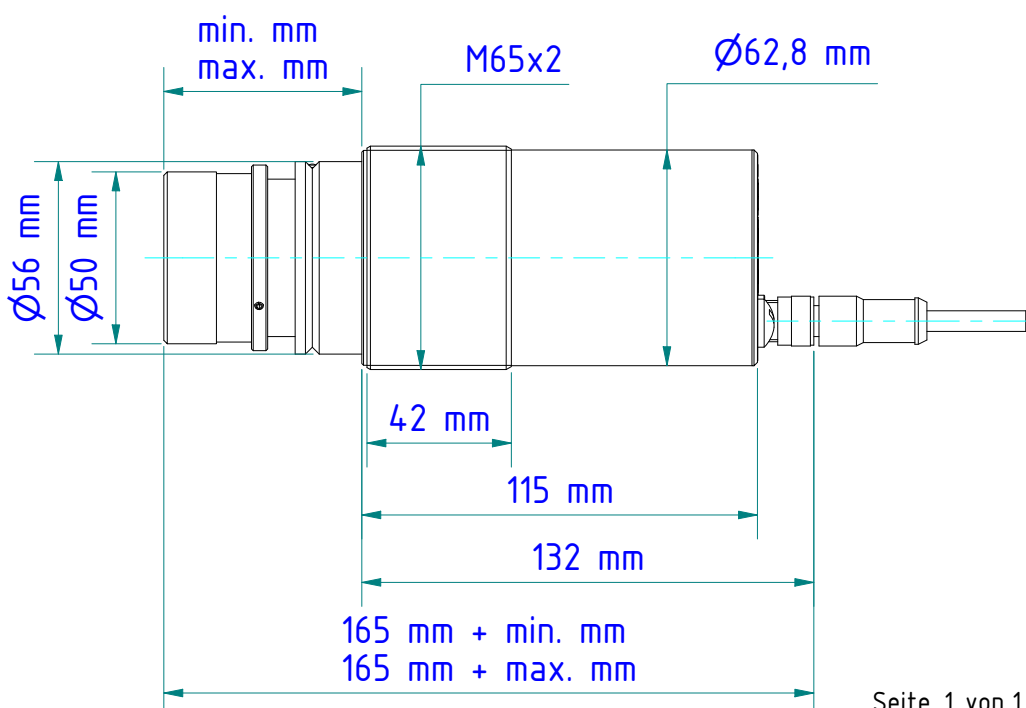

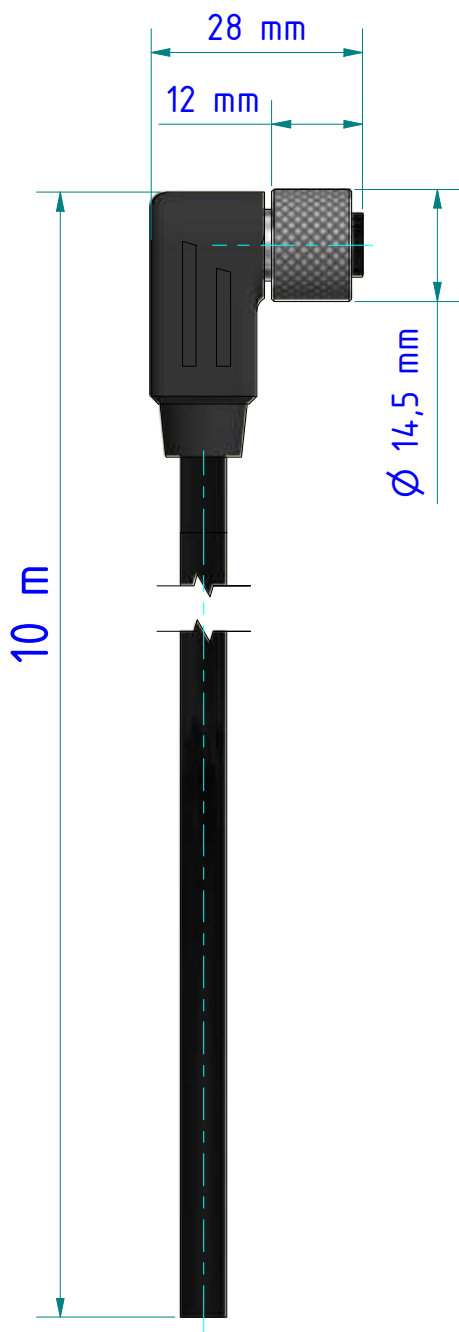

Anschlussquerschnitt 0,25mm² (AWG 24)
 Schutzart IP67 geschirmt
 Obere Grenztemperatur + 80°C
 Untere Grenztemperatur - 25°C

Wire gauge 0,25mm² (AWG 24)
 Degree of protection IP67 shielded
 Upper temperature + 80°C
 Lower temperature - 25°C


Gewicht: 0.624 Kg
 Weight: 0.624 Kg

Belegung
 Configuration

Pol
 contacts

weiß white	an 1 at 1
braun brown	an 2 at 2
grün green	an 3 at 3
gelb yellow	an 4 at 4
grau grey	an 5 at 5
rosa pink	an 6 at 6
blau blue	an 7 at 7
rot red	an 8 at 8

Schirm durchgängig an Verschraubung
 Shield constantly at screw connection

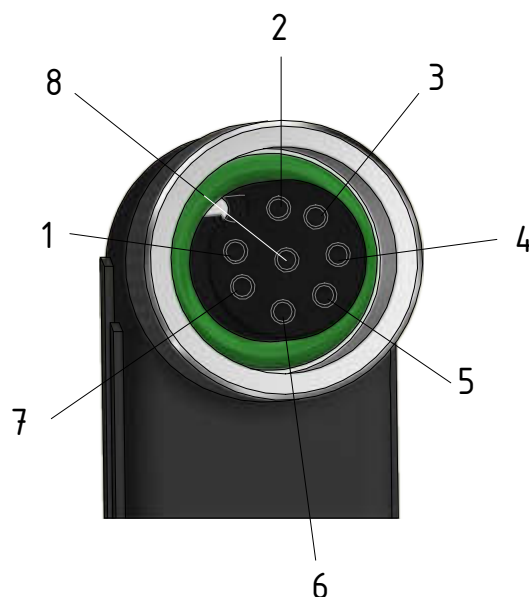

Seite 1 von 1
 Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi