
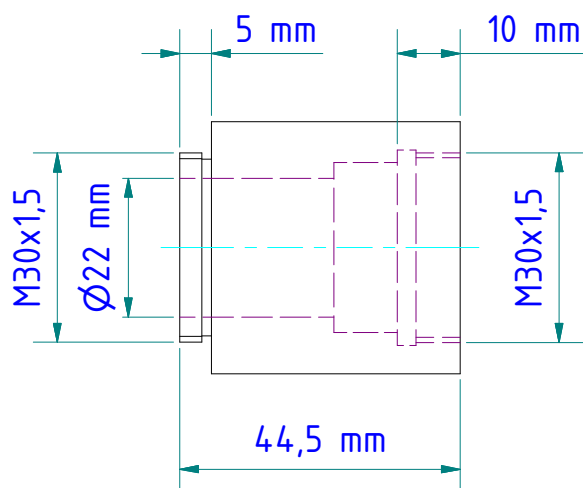


Temperaturbeständigkeit,
Dauergebrauchstemperatur
-40°C bis +100°C
kurzzeitig +140°C


Temperature stability,
Continuous operating temperature
-40°C to +100°C
short-time +140°C

Seite 1 von 1
Page 1 of 1

Gewicht: 0.044 Kg
Weight: 0.044 Kg
Werkstoff: POM
Material: POM

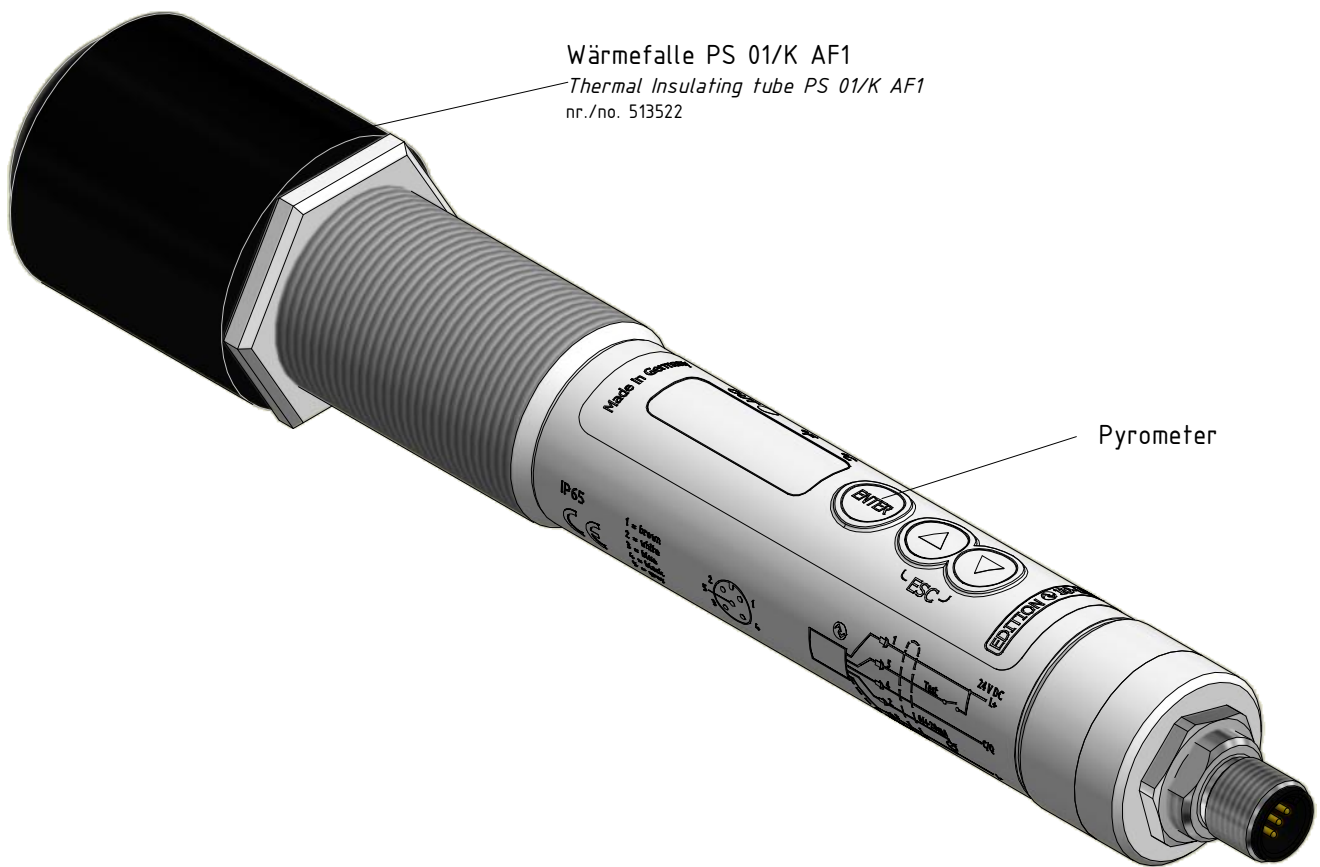

- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi