

Staubblende PZ 20/T

Dust stop PZ 20/T
nr./no. 561253

Zwischenrohr PZ 20/C
Intermediate tube PZ 20/C
nr./no. 561174

Befestigungsschelle PZ 20/L AF2
Clamping collar PZ 20/L AF2
nr./no. 561541

Kühlarmatur PZ 20/B AF5
Cooling jacket PZ 20/B AF5
nr./no. 561708

Axialluftdüse PZ 20/A AF1
Air purge PZ 20/A AF1
nr./no. 561176

★ Zwischenrohr PZ 20/J
Intermediate tube PZ 20/J
nr./no. 514814

★★ Quarz-Scheibenvorsatz PA 20/I
Quartz window PA 20/I
nr./no. 1008144

PZ Profibus
Pyrometer

Schlauchtülle G1/8"
für Schlauch mit lichter Weite 8 bis 9 mm
Hose nozzle G1/8"
for hose with inner width 8 to 9 mm



Halterung PB 08/K AF2
Clamping device PB 08/K AF2
nr./no. 1016808

Optional

★ PZ 20/J
nur bei Verwendung der Teleoptik einsetzen
★ PZ 20/J
only to use by using the teleoptics

★★ PZ 20/I

* mit PZ 20/J = 620 mm
with PZ 20/J = 620 mm
** mit PZ 20/I = 578 mm
with PZ 20/I = 578 mm

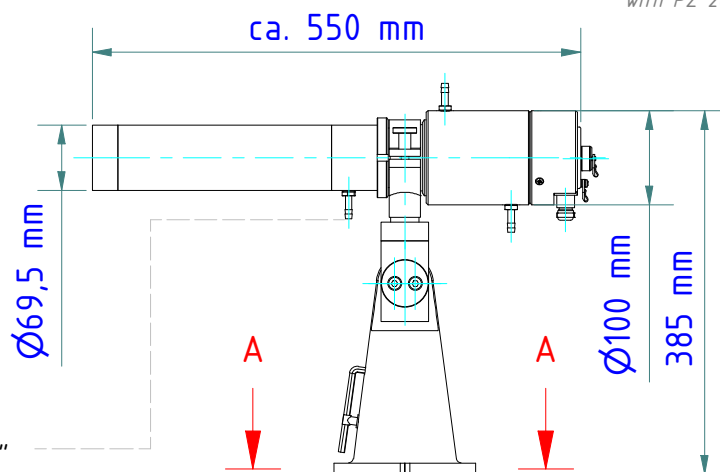

Schlauchtülle G1/8"
für Schlauch mit lichter Weite 8 bis 9 mm
Hose nozzle G1/8"
for hose with inner width 8 to 9 mm

Gewicht: 7.040 Kg
Weight: 7.040 Kg

Seite 1 von 1
Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi