
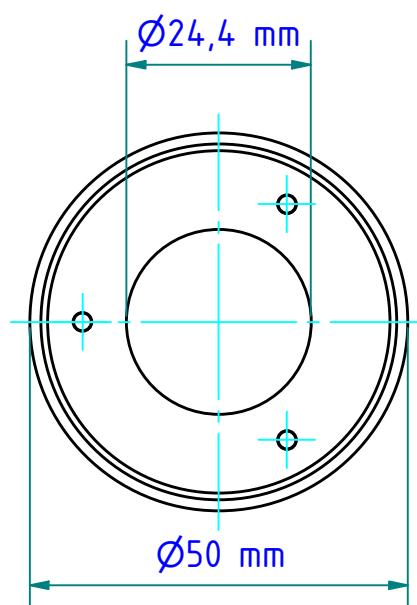
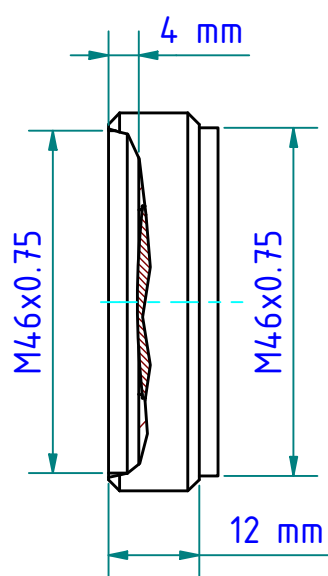
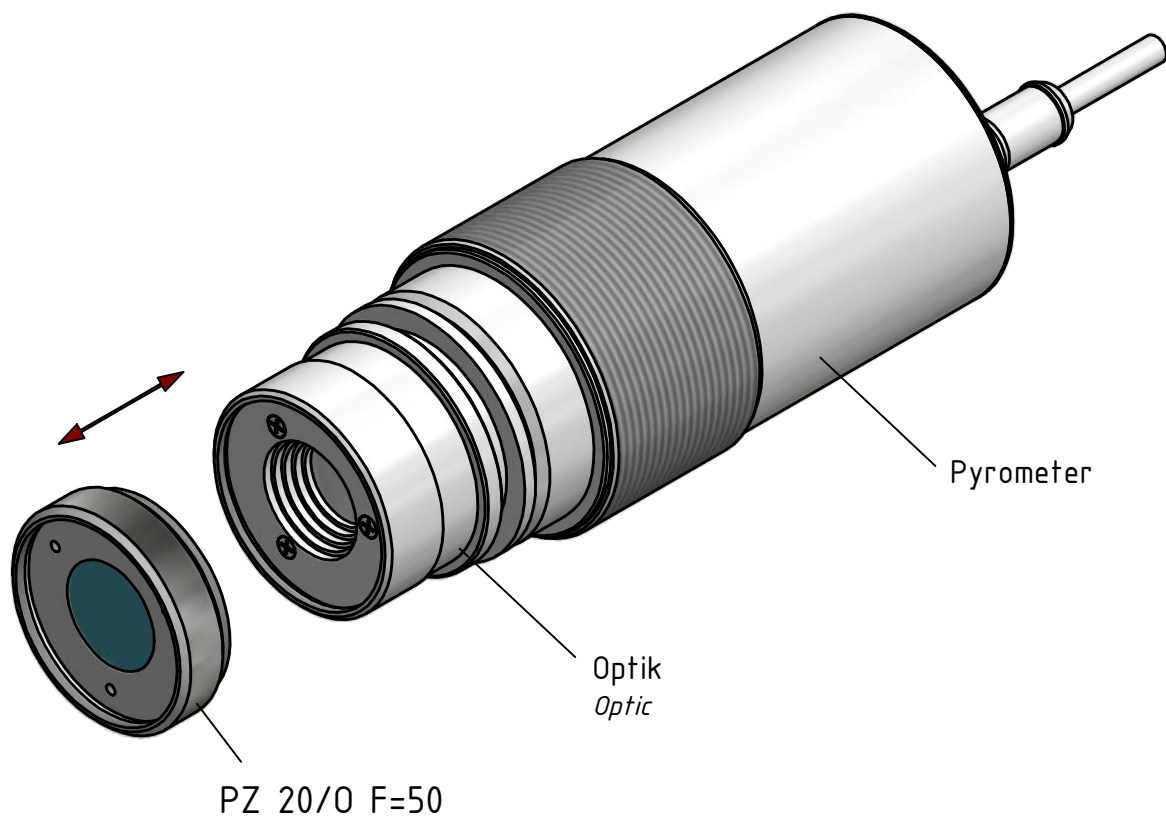




Gewicht: 0.060 Kg
 Weight: 0.060 Kg
 Werkstoff: 3.2315
 Material: 3.2315

Seite 1 von 2
 Page 1 of 2

Elektronik <i>Elektronic</i>	Optik <i>Lens</i>	Vorsatzlinse PZ 20/0-50 <i>Supplementary lens PZ 20/0-50</i>			
					
		Messabstand <i>Measuring distance</i> (mm)	Messfleck <i>Measuring spot</i> Ø in mm		
PA 28 AF 10 PA 29 AF 10	Optik F50 (50mm) PZ 20.08	34 - 41	1,28 - 1,75		
PA 2x, 3x PA 4x (750-2400 °C) (850-3000 °C)	Standard-Optik (75mm) PZ 20.01	36 - 41	0,35 - 0,45		
	Nah-Optik (63mm) PZ 20.03	31 - 36	0,30 - 0,45		
	Tele-Optik (120mm) PZ 20.06	41	0,3		
	Optik F50 (50mm) PZ 20.08	34	0,35 ... 0,45		
PA 4x (650-1700 °C)	Standard-Optik (75mm) PZ 20.01	36 - 41	0,65 - 0,90		
	Nah-Optik (63mm) PZ 20.03	31 - 36	0,60 - 0,80		
	Tele-Optik (120mm) PZ 20.06	41	0,55		
	Optik F50 (50mm) PZ 20.08	36 - 41	1,0 - 1,4		
PA 43 (650-1700 °C)	Standard-Optik (75mm) PZ 20.01	34 - 41	h	1,2 - 1,6	
			v	0,2 - 0,3	
	Nah-Optik (63mm) PZ 20.03	31 - 35	h	1,1 - 1,4	
			v	0,2 - 0,3	
	Tele-Optik (120mm) PZ 20.06	41	h	1	
			v	0,2	
	Optik F50 (50mm) PZ 20.08	34 - 41	h	1,7 - 2,4	
			v	0,3 - 0,5	
PA 43 (750-2400 °C) (850-3000°C)	Standard-Optik (75mm) PZ 20.01	35 - 41	h	1,0 - 1,4	
			v	0,2	
	Nah-Optik (63mm) PZ 20.03	31 - 35	h	0,9 - 1,2	
			v	0,2	
	Tele-Optik (120mm) PZ 20.06	41	h	0,9	
			v	0,1	
	Optik F50 (50mm) PZ 20.08	34 - 41	h	1,5 - 2,1	
			v	0,3	

h = horizontal / v = vertikal

h = horizontal / v = vertical



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi