


PZ-Pyrometer
12-polig
12-pin

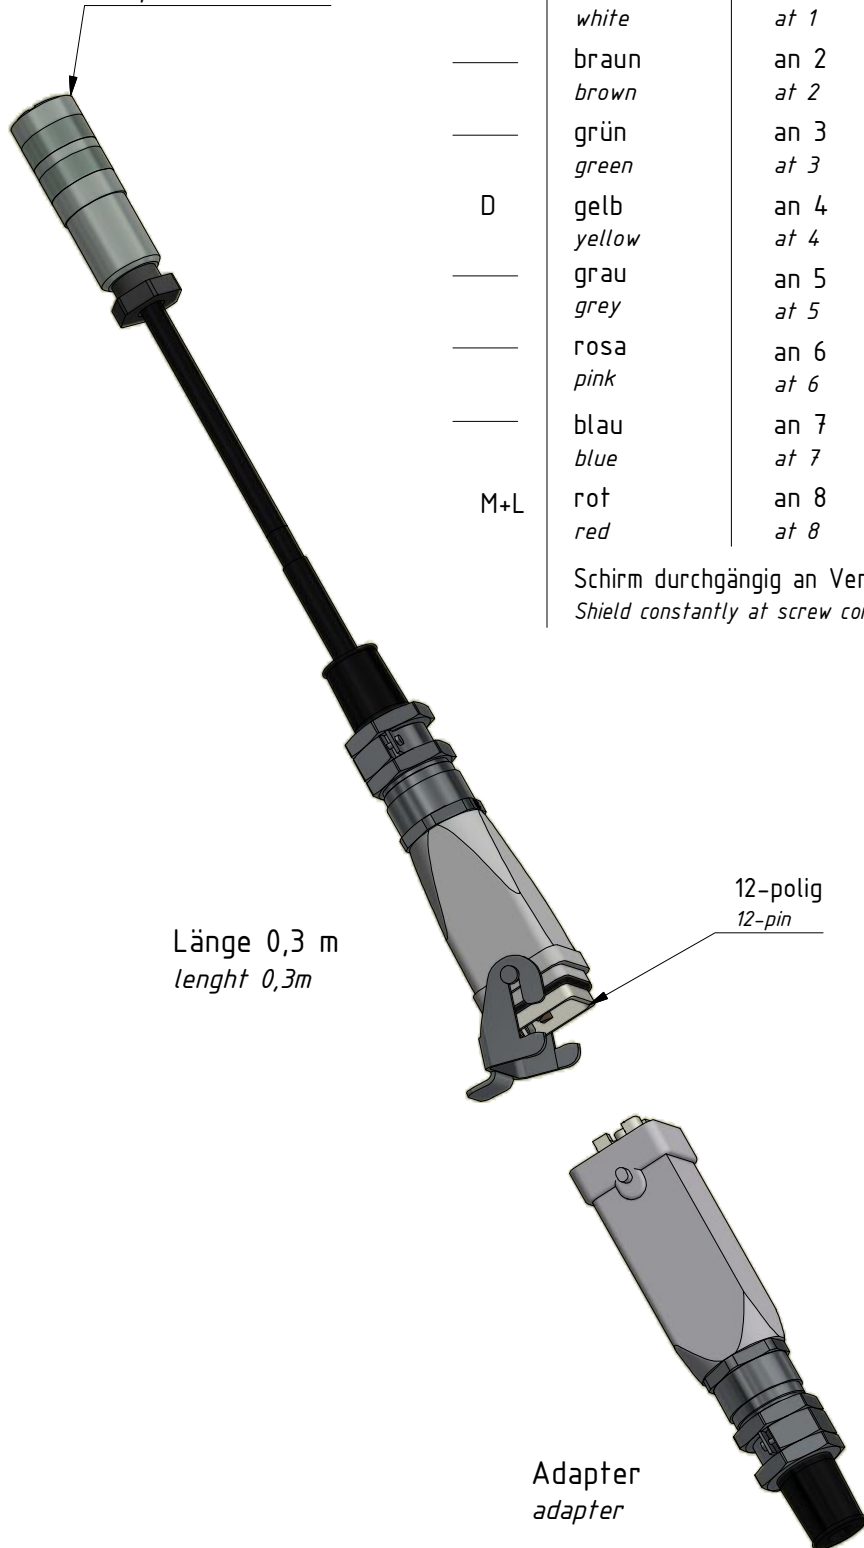

Länge 0,3 m
length 0,3m

12-polig
12-pin

12x Kontaktbuchse
12x female contact

Adapter
adapter

PZ Pol contacts	Belegung Configuration	Harting-Stecker connector	Funktion function
J	weiß white	an 1 at 1	+24 V DC +24 V DC
—	braun brown	an 2 at 2	Schalt ein- / ausgang 1 Digital in- / output 1
—	grün green	an 3 at 3	Stromausgang 2 Analogue output 2
D	gelb yellow	an 4 at 4	Stromausgang 1 Analogue output 1
—	grau grey	an 5 at 5	Serielle Schnittstelle RS485 (A) Serial interface RS485 (A)
—	rosa pink	an 6 at 6	Serielle Schnittstelle (B) Serial interface (B)
—	blau blue	an 7 at 7	Schalt ein- / ausgang 2 Digital in- / output 2
M+L	rot red	an 8 at 8	GND GND

Schirm durchgängig an Verschraubung
Shield constantly at screw connection

Gewicht: Kg
Weight: Kg

Seite 1 von 1
Page 1 of 1



- Headquarters
- Sales and Service Center
- Sales abroad



Keller HCW GmbH
Infrared Temperature Solutions (ITS)
Carl-Keller-Straße 2-10
49479 Ibbenbüren-Laggenbeck
Germany

www.keller.de/its
Tel. +49 (0) 5451 850
Fax +49 (0) 5451 85412
its@keller.de

Distributor



INOR Transmitter Oy
Unikkotie 13
FI-01300 Vantaa
Puhelin +358 10 4217900
Faksi +358 10 4217901
myynti@inor.fi